

KH-VIA/DKIS

全自动单针绗缝机

FULL-AUTO SINGLE-NEEDLE QUILTING MACHINE

DETAIL
细节图




KH-VIA

KH-DK1S

INSTALLATION DIMENSION

安装尺寸



TECHNICAL PARAMETERS

技术参数

	KH-VIA	KH-DK1S
绗缝宽度 Quilting Width	≤2400mm	≤2400mm
针步 Stitch Length	2-6mm	2-6mm
转速 Rotating Speed Of Needle	3200RPM	3200RPM
总功率 Total Power	8.5KW	5.5KW
电源 Power Supply	380V 50HZ	380V 50HZ
重量 Total Weight	2500kg	2500kg



噪音小



耐磨损



速度快




精度高



高效



稳定

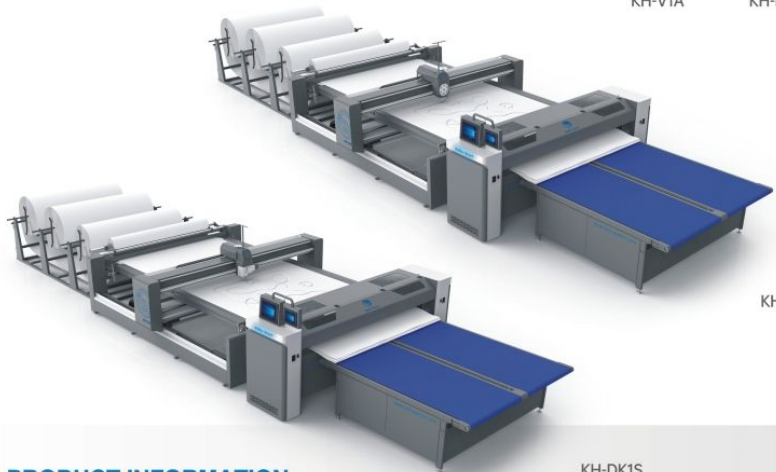

KH-VIA

KH-DK1S

PRODUCT INFORMATION

产品信息

- 360°独立跳花功能，超大容量记忆系统，花纹储存10万个以上；
360° Jump quilting, large capacity patterns storage system (up to 100,000 and above patterns);
- 自动剪线、断线自动停机、断线自动定位补缝；
Auto thread trimming, auto-stop when thread-breaking, patterns auto-positioning amending after thread-breaking;
- 产量计数、花样效果、加工轨迹等多数据显示；
Output counting, pattern effect display, processing locus display functions;
- 专业打版软件，扫描输入BMP图形打版，CAD方法绘图；
Professional pattern-designing software, scanner-input patterns with BMP format, CAD method pattern designing;
- 数据实时保护，突发停电后仍在原位位置继续作业；
Real time data protection, operation continuing in original position after sudden power shortage;
- 全自动工作，自动升降边切刀裁剪。
Full automatic working, automatic lifting edge cutter cutting.



PATTERN
花样图



压脚可根据物料厚度调节
Presser foot can be adjusted according to different thickness



压脚可根据物料厚度调节
Presser foot can be adjusted according to different thickness



进口特大旋梭
Imported outside lockstitch sewing



三倍大旋梭
Triple outside lockstitch sewing



Windows电脑控制系统
Windows operating system



全进口伺服电机
Imported servo motors

evotec.com.br