


KH-430

Hi-speed Multi-needle Quilting Machine 高速多针绗缝机

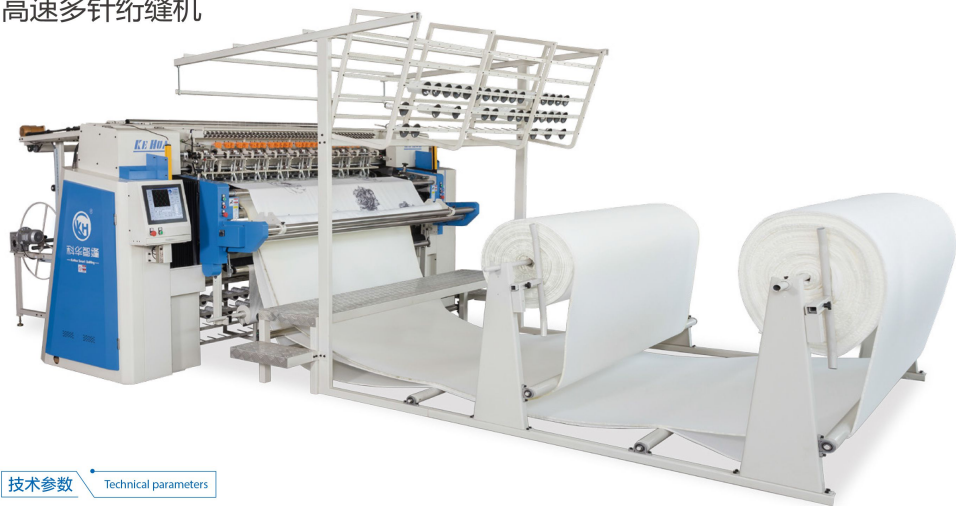

技术参数 Technical parameters

绗缝宽度	Quilting Width	≤ 2400mm
绗缝厚度	Quilting Thickness	≤ 80mm
针步	Stitch Length	1-6mm
转速	Rotating Speed of Needle	1400RPM
针排距	Needle Array Pitch	25.4mm (12.7 可选 optional)
总功率	Total Power	7.5KW
电源	Power Supply	380V 50Hz
外型尺寸	Overall Dimension	6500 × 4700 × 2800mm
重量	Total Weight	5300kg

产品具体信息 Product Main Information

- 新颖的外观专利设计，更美观、稳健；
 - 转速高达 1400RPM，产生更高的效率；
 - 采用 Windows 系统，操作简便，花样绗缝直观精美；
 - 电脑可设补偿修正，幅度修正功能，绗缝图案精确完美；
 - 红外线断线检测，具有自动停机、自动剪线功能；
 - 选用全进口大功率伺服电机，精密度高；
 - 可设定绗缝长度，完成后自动停机；花样轨迹跟踪作业，运行模式自动检测。
 - 分体式钩座设计，换钩无需调整；
 - 外设按钮控制主轴正反转，调勾更轻松；
 - 全机设置红外光幕保护，触手即停，更安全可靠。
- Innovative appearance patent design, more beautiful and steady;
 - Maximum speed up to 1400RPM, resulting in higher efficiency;
 - Adopt Windows operating system, easy operation, patterns intuitive and precise;
 - Computerized compensation and extent amendment, ensuring better precision and perfection;
 - Functions such as Infrared disconnection detection with automatic stop and automatic thread trimming;
 - Adopt imported servo motors, high precision;
 - Quilting length adjustable, auto stop when completed; Pattern effect process track, auto detection operation;
 - Split hook design, replace the hook without adjustment;
 - Peripheral buttons to control the spindle to rotate positive and reversal, adjust hook more easily;
 - The whole machine is set with the infrared light curtain protection, touch the hand to stop, more secure and reliable.

细节图 Details of the figure


 可选装分缝装置
 Optional Slitting Device

花样图 patterns figure

