

# KH-V2A / DK2S

## 全自动双针绗缝机


FULL-AUTO DUAL-NEEDLE QUILTING MACHINE

DETAIL  
细节图



KH-V2A

KH-DK2S

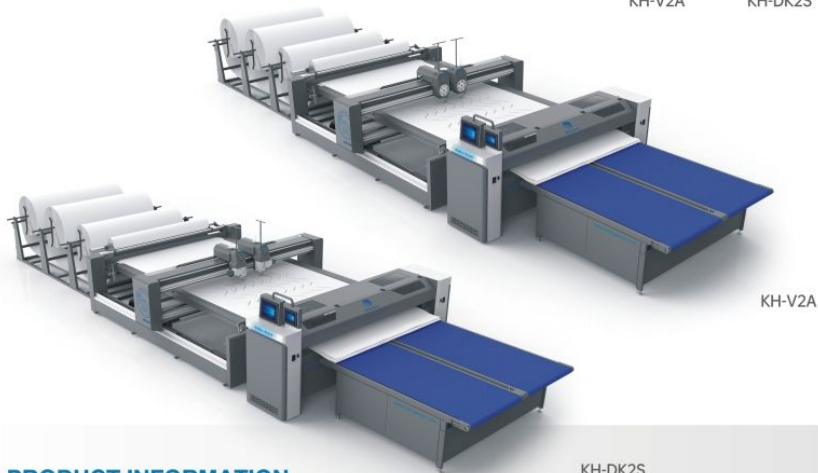


KH-V2A

KH-DK2S

## INSTALLATION DIMENSION

安装尺寸



## TECHNICAL PARAMETERS

技术参数

	KH-V2A	KH-DK2S
绗缝宽度 Quilting Width	≤2400mm	≤2400mm
针步 Stitch Length	2-6mm	2-6mm
转速 Rotating Speed Of Needle	3200RPM	3200RPM
总功率 Total Power	12KW	9KW
电源 Power Supply	380V 50HZ	380V 50HZ
重量 Total Weight	2600kg	2600kg



噪音小



耐磨损



速度快



精度高



高效



稳定

## PRODUCT INFORMATION

产品信息

- Windows电脑控制系统;  
Windows operating system;
- 全进口伺服电机;  
Imported servo motors;
- 压脚可根据物料厚度调节;  
Presser foot can be adjusted according to different thickness;
- 产量计数、花样效果、加工轨迹等多数据显;  
Output counting, pattern effect display, processing locus display functions;
- 自动剪线、断线自动停机、断线自动定位补绣;  
Auto thread trimming, auto-stop when thread-breaking, patterns auto-positioning amending after thread-breaking;
- 数据实时保护, 突发停电后仍在原位继续作业;  
Real time data protection, operation continuing in the original position after sudden power shortage;
- 全自动工作, 自动升降边切刀裁剪。  
Full automatic working, automatic lifting edge cutter cutting.



PATTERN  
花样图



压脚可根据物料厚度调节  
Presser foot can be adjusted according to different thickness



压脚可根据物料厚度调节  
Presser foot can be adjusted according to different thickness



进口特大旋梭  
Imported outside lockstitch sewing



三倍大旋梭  
Triple outside lockstitch sewing



全进口伺服电机  
Imported servo motors



双机头可同时或单独使用  
Dual heads can be used simultaneously or separately

evotec.com.br